


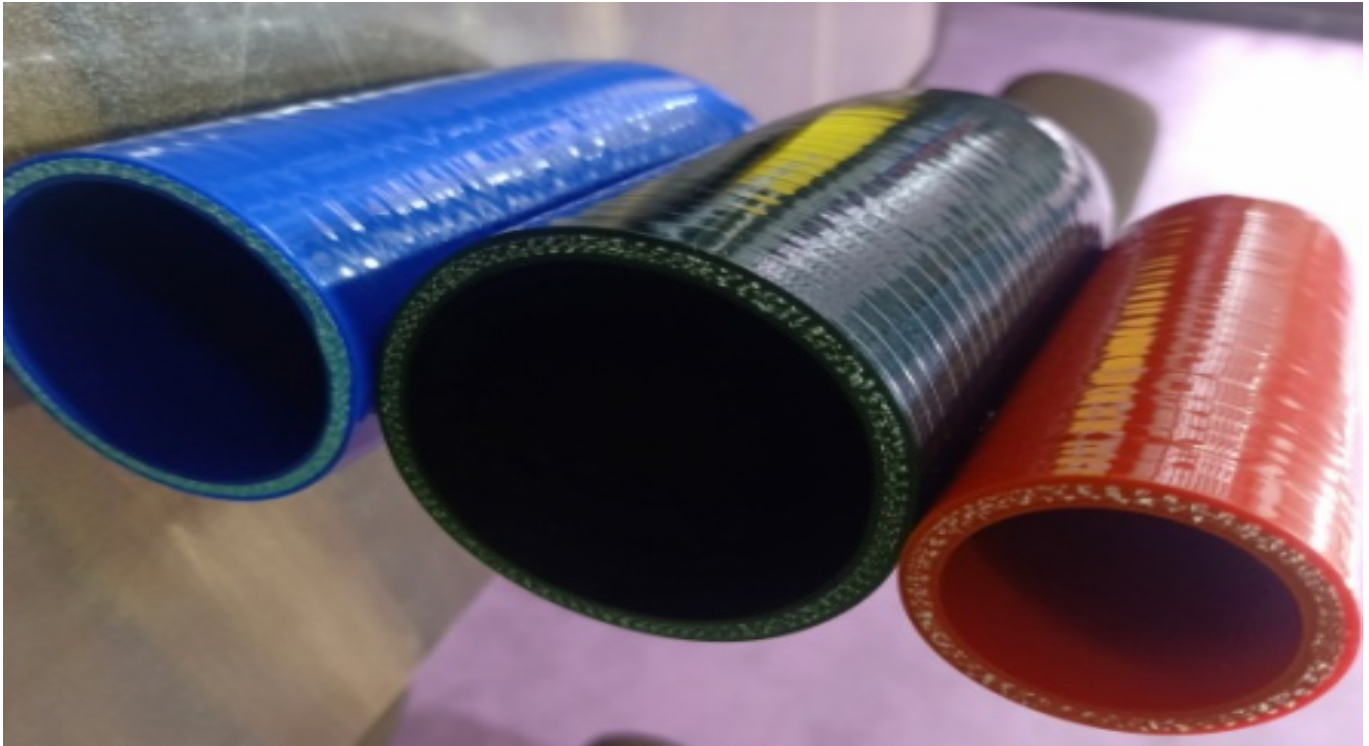

Silicone Standard Straight Hose

Uses: In heavy duty high temperature and pressure coolant connection in Diesel Engine.

Features:

- 3/4/5 plies Silicone Polyester reinforcement construction.
- Application Temperature - -55°C to $+180^{\circ}\text{C}$
- Material Properties and Hose performance as per SAE J20 R1 H1, Class A material.
- EC (Electro-chemical) Resistance
- Ozone Resistance.
- Available in Blue, Red & Black Colour

Sizes

Sr. No.	Hose ID,(mm)	Wall Thickness(mm)	Length(meter)	No. ofPlies
1	9.5	4	1, 2 , 3, 4	3
2	11	4	1, 2 , 3, 4	3
3	13	4	1, 2 , 3, 4	3
4	16	4	1, 2 , 3, 4	3
5	19	4	1, 2 , 3, 4	3
6	22	4	1, 2 , 3, 4	3
7	25	4	1, 2 , 3, 4	3
8	28	4	1, 2 , 3, 4	3
9	30	4	1, 2 , 3, 4	3
10	32	4	1, 2 , 3, 4	3
11	35	4	1, 2 , 3, 4	3
12	38	4	1, 2 , 3, 4	3
13	40	4	1, 2 , 3, 4	3
14	45	4	1, 2 , 3, 4	3
15	48	4	1, 2 , 3, 4	3
16	51	5	1, 2 , 3, 4	4
17	54	5	1, 2 , 3, 4	4
18	57	5	1, 2 , 3, 4	4
19	60	5	1, 2 , 3, 4	4
20	63	5	1, 2 , 3, 4	4
21	65	5	1, 2 , 3, 4	4

22	68	5	1, 2, 3, 4	4
23	70	5	1, 2, 3, 4	4
24	76	5	1, 2, 3, 4	4
25	80	5	1, 2, 3, 4	4
26	83	5	1, 2, 3, 4	4
27	90	5	1, 2, 3, 4	4
28	102	5	1, 2, 3, 4	4
29	114	5	1, 2, 3, 4	4
30	127	5	1, 2, 3, 4	4
31	152	5	1, 2, 3, 4	4